


# RI-D384-C

## Multifunction Power Meter – Single CT Connection DIN Rail Mounting - LCD Display




- 4 Module DIN rail mounting
- Single phase or 3 phase (4 wire) network balanced or unbalanced load
- Built-in energy pulse output and RS485 MODBUS communication
- Wide range of measured parameters (see table below)
- High quality backlit LCD display
- -/1A or -/5A current transformer operated
- Active energy class 1 (EN62053-21)
- Reactive energy class 2 (EN62053-23)
- 3-phase: 140...460Vac measured voltage
- Single phase: 80...265Vac measured voltage
- Auxiliary supply 85 to 270Vac 50/60Hz <8VA
- Programmable CT ratio 5...10,000A
- Programmable VT ratio
- Frequency 45/65Hz
- Weight 190g

### Function Diagram

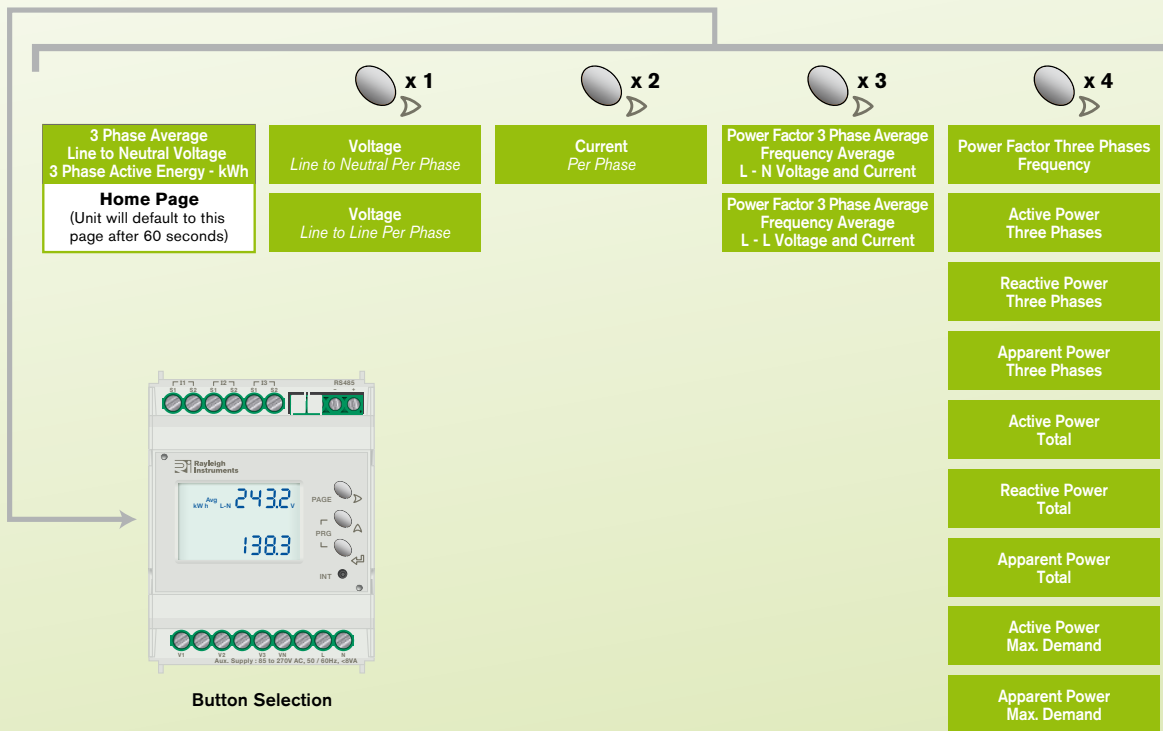

### Dimension Diagrams (mm)

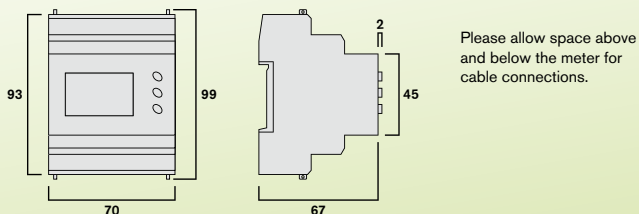

### How to Order / Model Reference

eg **RI-D384-C 00**

Model	RI-D384-C	00
Output		00
With built-in Pulse and RS485 Modbus RTU output		